


AEU-DO75M


Male connector with shutter DN 5,1

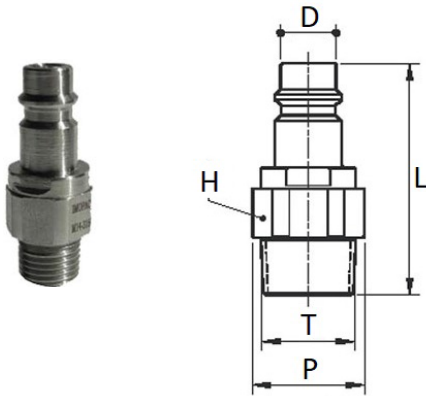

CODE	T	ØD	L	ØP	H
AEU-DO75M14	R1/4"	10	18,0	44,0	17
AEU-DO75M14-316V	R1/4"	10	18,0	44,0	17
AEU-DO75M38	R3/8"	10	20,2	44,5	19
AEU-DO75M38-316V	R3/8"	10	20,2	44,5	19
AEU-DO75M12	R1/2"	10	23,4	48,5	22
AEU-DO75M12-316V	R1/2"	10	23,4	48,5	22

AEU-DO75H


Female connection with shutter DN 5,1

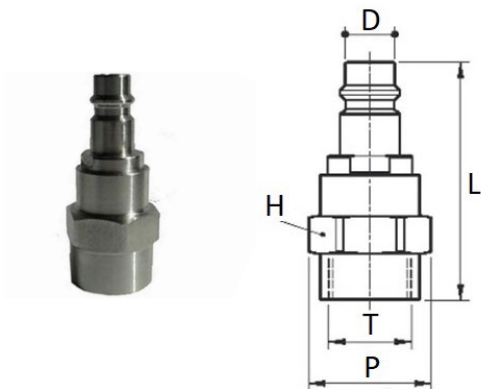

CODE	T	ØD	L	ØP	H
AEU-DO75H14	G1/4"	10,0	49,3	18,0	17
AEU-DO75H14-316V	G1/4"	10,0	49,3	18,0	17
AEU-DO75H38	G3/8"	10,0	50,8	20,2	19
AEU-DO75H38-316V	G3/8"	10,0	50,8	20,2	19
AEU-DO75H12	G1/2"	10,0	56,5	23,4	22
AEU-DO75H12-316V	G1/2"	10,0	56,5	23,4	22

AEU-DO75E

Connection with shutter with barb connector DN 5,1

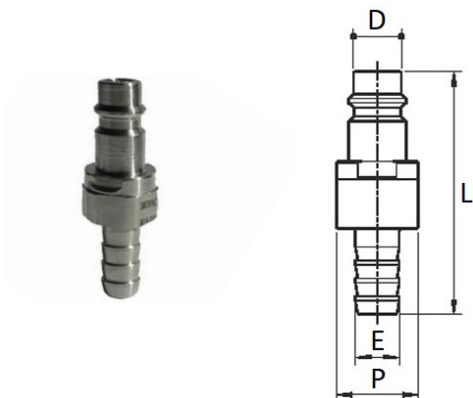

CODE	E	ØD	L	ØP
AEU-DO75E8	9,2	10	54,0	17
AEU-DO75E8-316V	9,2	10	54,0	17
AEU-DO75E10	11,2	10	58,0	17

